

Tuleja Mocująca BK19


Wymiary							Moment Przenoszony		Nacisk	Śruby Montażowe		
Ød mm	ØD mm	d _w mm	L ₁ mm	L ₂ mm	L mm	C _(d_w-d₁) mm	M _t Nm	F _t kN	wał P N/mm ²	ilość	Size	T _s Nm
24	50	19	14	19.5	23.0	0.017	170	15.0	286.0	6	M5x18	4.9
		20					210	18.5				
		21					250	21.0				
30	60	24	16	21.5	25.0	0.017	300	15.7	233.0	7	M5x18	4.9
		25					340	23.7				
		26					380	26.7				
36	72	28	18	23.5	27.5	0.032	440	27.0	307.0	5	M6x20	11.8
		30					570	38.0				
		31					630	43.0				
44	80	32	20	25.5	29.5	0.032	620	44.0	317.0	7	M6x20	11.8
		35					780	49.0				
		36					860	54.0				
50	90	38	22	27.5	31.5	0.032	940	48.8	289.0	8	M6x25	11.8
		40					1160	58.8				
		42					1380	69.0				
55	100	42	23	30.5	34.5	0.032	1160	48.0	252.0	8	M6x25	11.8
		45					1520	61.7				
		48					1880	77.0				
62	110	48	23	30.5	34.5	0.048	1850	69.0	279.0	10	M6x25	11.8
		50					2200	80.9				
		52					2400	90.0				
68	115	50	23	30.5	34.5	0.048	2000	71.2	255.0	10	M6x25	11.8
		55					2500	80.9				
		60					3150	95.7				
75	138	55	25	32.5	37.8	0.048	2500	94.4	273.0	7	M8x30	29.4
		60					3200	111.0				
		65					3950	126.0				
80	145	60	25	32.5	37.8	0.048	3200	99.3	256.0	7	M8x30	29.4
		65					3900	115.0				
		70					4600	130.0				
90	155	65	30	39.0	44.3	0.048	4750	141.0	271.0	10	M8x35	29.4
		70					6000	160.0				
		75					7250	178.0				
100	170	70	34	44.0	49.3	0.048	6900	163.0	258.0	12	M8x35	29.4
		75					7500	182.0				
		80					9000	202.0				
110	185	75	39	50.0	56.4	0.048	7200	185.0	244.0	9	M10x40	57.8
		80					9000	207.0				
		85					10800	221.0				

tuleja BK19

Tolerancje:

d:- h8

D:- H8

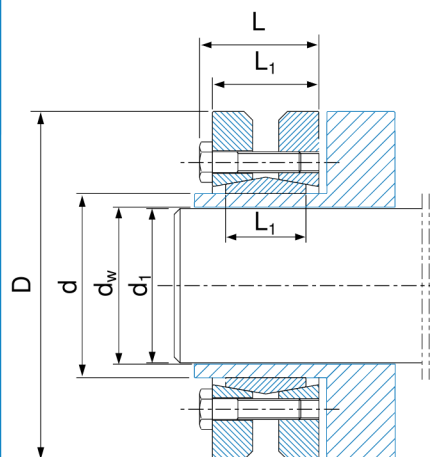

Tuleja BK19

Wymiary							Moment Przenoszony		Nacisk	Śruby Montażowe		
Ød mm	ØD mm	dw mm	L ₁ mm	L ₂ mm	L mm	C _(dw-d1) mm	Mt Nm	Ft kN	wał P N/mm ²	ilość	Size	Ts Nm
125	215	85	42	54.0	60.4	0.069	11000	240.0	266.0	12	M10x40	57.8
		90					13000	262.0				
		95					15000	285.0				
		95					15100	308.0				
140	230	100	46	60.5	68.0	0.069	17600	331.0	264.0	10	M12x45	98.0
		105					20100	357.0				
		105					22000	366.0				
		110					25000	392.0				
155	265	110	50	64.5	72.0	0.069	28000	417.0	263.0	12	M12x50	98.0
		115					31000	513.0				
		115					25000	544.0				
		120					39000	564.0				
165	290	125	56	71.0	81.0	0.069			277.0	8	M16x55	245.0

