

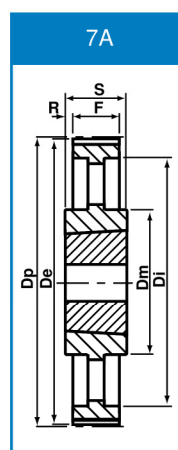
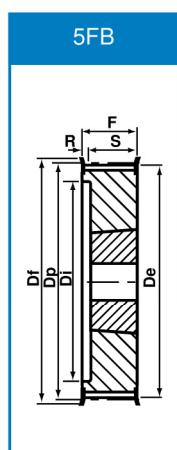
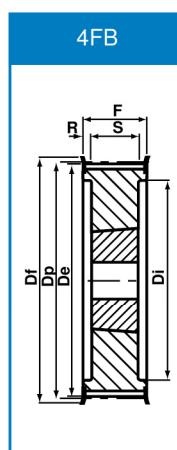


Koła pasowe HTD pod Taper Lock

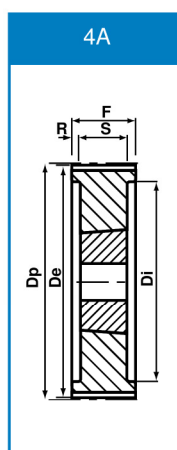

Koła pasowe 5M 15 (dla pasa o szer. 15mm)

Oznaczenie	ilość zębów	Typ	Taper lock	Material	Dp	De	Df	Dm	Di	F	S	R	Kg
34-5M-15	34	8FB	1008	stal	54.11	52.97	57.00	43	-	20.5	22	1.50	0.19
36-5M-15	36	8FB	1108		57.30	56.16	60.00	44	-	20.5	22	1.50	0.20
38-5M-15	38	8FB	1108		60.48	59.34	66.00	48	-	20.5	22	1.50	0.25
40-5M-15	40	8FB	1108		63.66	62.52	71.00	52	-	20.5	22	1.50	0.31
44-5M-15	44	8FB	1108		70.03	68.89	75.00	54	-	20.5	22	1.50	0.40
48-5M-15	48	8FB	1210	żeliwo	76.39	75.25	83.00	64	-	20.5	25	4.50	0.45
56-5M-15	56	8FB	1210		89.13	87.99	93.00	70	-	20.5	25	4.50	0.67
64-5M-15	64	8FB	1210		95.49	94.35	106.00	78	-	20.5	25	4.50	0.96
72-5M-15	72	8FB	1610		114.59	113.45	119.00	90	-	20.5	25	4.50	1.19
80-5M-15	80	8FB	1610		127.32	126.18	135.00	92	-	20.5	25	4.50	1.57
90-5M-15	90	7A	1610		143.24	142.10	-	92	126	20.5	25	2.30	1.47
112-5M-15	112	7A	1610		178.25	177.11	-	92	162	20.5	25	2.30	1.94
136-5M-15	136	7A	2012		216.45	215.31	-	106	199	20.5	32	5.80	3.06
150-5M-15	150	7A	2012		238.73	237.59	-	106	222	20.5	32	5.80	3.90

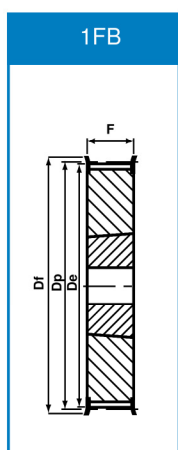

Koła pasowe 8M 20 (dla pasa o szer. 20mm)

Oznaczenie	ilość zębów	Typ	Taper lock	Material	Dp	De	Df	Dm	Di	F	S	R	Kg
22-8M-20	22	5FB	1008	żeliwo	56.02	54.65	60.00	-	41	28	22	6.00	0.24
24-8M-20	24	5FB	1108		61.12	59.75	66.00	-	42	28	22	6.00	0.30
26-8M-20	26	5FB	1108		66.21	64.84	71.00	-	46	28	22	6.00	0.36
28-8M-20	28	5FB	1108		71.30	70.08	75.00	-	50	28	22	6.00	0.44
30-8M-20	30	5FB	1108		76.39	75.13	83.00	-	58	28	22	6.00	0.53
32-8M-20	32	5FB	1610		81.49	80.16	87.00	-	62	28	25	3.00	0.42
34-8M-20	34	5FB	1610		86.58	85.22	91.00	-	65	28	25	3.00	0.55
36-8M-20	36	5FB	1610		91.67	90.30	98.50	-	68	28	25	3.00	0.68
38-8M-20	38	5FB	1610		96.77	95.39	103.00	-	72	28	25	3.00	0.80
40-8M-20	40	5FB	1610		101.86	100.49	106.00	-	76	28	25	3.00	1.00
44-8M-20	44	8FB	2012		112.05	110.67	119.00	93	-	28	32	4.00	1.20
48-8M-20	48	8FB	2012		122.23	120.86	127.00	96	-	28	32	4.00	1.60
56-8M-20	56	8FB	2012		142.60	141.23	148.00	110	-	28	32	4.00	2.40
64-8M-20	64	8FW	2012		162.97	161.60	168.00	110	137	28	32	4.00	2.70
72-8M-20	72	8FW	2012		183.35	181.97	192.00	110	158	28	32	4.00	3.30
80-8M-20	80	8W	2012		203.72	202.35	-	110	180	28	32	4.00	3.50
90-8M-20	90	8A	2012		229.18	227.81	-	110	204	28	32	4.00	3.65
112-8M-20	112	8A	2517		285.21	283.83	-	125	260	38	45	7.00	6.20
144-8M-20	144	8A	2517		366.69	365.32	-	125	341	38	45	7.00	9.00
168-8M-20	168	7A	3525		427.81	426.44	-	190	402	60	65	2.50	16.40
192-8M-20	192	7A	3525		488.92	487.55	-	190	460	60	65	2.50	21.80