


Koła pasowe calowe pod Taper Lock



Koła pasowe 3/8" (9.525mm) L050

Ilość zębów	Typ	Taper Lock	De	Dp	Df	Dm	Di	F	S	R	Kg
18	8FB	1108	53.81	54.57	60	43	-	19	22	3.0	0.2
19	8FB	1108	56.84	57.61	63	43	-	19	22	3.0	0.2
20	8FB	1108	59.88	60.64	67	48	-	19	22	3.0	0.2
21	8FB	1108	62.91	63.67	70	48	-	19	22	3.0	0.3
22	8FB	1108	65.94	66.70	75	51	-	19	22	3.0	0.3
23	8FB	1108	68.97	69.73	79	54	-	19	22	3.0	0.4
24	8FB	1108	72.00	72.77	79	54	-	19	22	3.0	0.4
25	8FB	1108	75.04	75.80	87	56	-	19	22	3.0	0.5
26	8FB	1108	78.07	78.83	87	60	-	19	22	3.0	0.5
27	8FB	1108	81.10	81.86	91	65	-	19	22	3.0	0.6
28	8FB	1108	84.13	84.89	91	65	-	19	22	3.0	0.6
30	8FB	1108	90.20	90.96	97	70	-	19	22	3.0	0.8
32	8FB	1108	96.26	97.02	102	74	-	19	22	3.0	0.9
36	8FB	1108	108.39	109.15	120	87	-	19	22	3.0	1.2
40	8FB	1210	120.51	121.28	128	87	-	19	25	6.0	1.5
48	8FW	1210	144.77	145.53	150	88	124	19	25	6.0	2.3
60	7B	1610	181.15	181.91	-	92	166	19	25	3.0	2.0
72	7A	1610	217.53	218.30	-	92	202	19	25	3.0	3.0
84	7A	1610	253.90	254.68	-	106	236	19	25	3.0	4.0
96	7A	2012	290.30	291.06	-	106	270	19	32	6.5	5.5
120	7A	2012	363.07	363.83	-	106	343	19	32	6.5	6.8

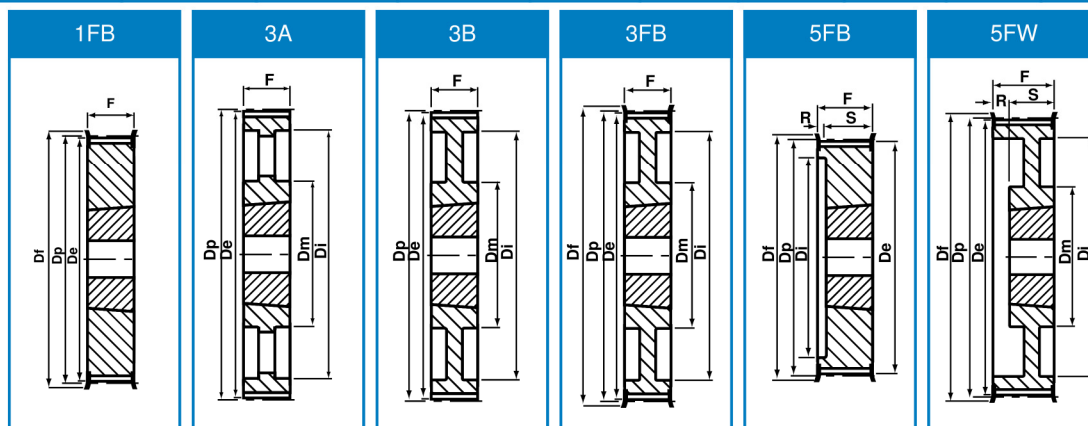

Koła pasowe 3/8" (9.525mm) L075

Ilość zębów	Typ	Taper Lock	De	Dp	Df	Dm	Di	F	S	R	Kg
18	1FB	1108	53.81	54.57	60	-	-	25	25	-	0.2
19	1FB	1108	56.84	57.61	63	-	-	25	25	-	0.3
20	1FB	1108	59.88	60.64	67	-	-	25	25	-	0.3
21	1FB	1108	62.91	63.67	70	-	-	25	25	-	0.4
22	1FB	1108	65.94	66.70	75	-	-	25	25	-	0.4
23	1FB	1108	68.97	69.73	79	-	-	25	25	-	0.4
24	1FB	1108	72.00	72.77	79	-	-	25	25	-	0.5
25	1FB	1108	75.04	75.80	87	-	-	25	25	-	0.6
26	1FB	1108	78.07	78.83	87	-	-	25	25	-	0.6
27	1FB	1108	81.10	81.86	91	-	-	25	25	-	0.7
28	1FB	1108	84.13	84.89	91	-	-	25	25	-	0.7
30	1FB	1108	90.20	90.96	97	-	-	25	25	-	0.9
32	1FB	1108	96.26	97.02	102	-	-	25	25	-	1.0
36	1FB	1210	108.39	109.15	120	-	-	25	25	-	1.2
40	1FB	1210	120.51	121.28	128	-	-	25	25	-	1.7
48	3FB	1610	144.77	145.53	150	92	125	25	25	-	2.5
60	3B	1610	181.15	181.91	-	92	166	25	25	-	3.0
72	3A	1610	217.53	218.30	-	92	202	25	25	-	4.0
84	7A	2012	253.90	254.68	-	106	236	25	32	3.5	5.2
96	7A	2012	290.30	291.06	-	106	270	25	32	3.5	6.5
120	7A	2012	363.07	363.83	-	106	343	25	32	35.0	7.6