


# Koła pasowe calowe pod Taper Lock



## Koła pasowe 3/8" (9.525mm) L100

Ilość zębów	Typ	Taper Lock	De	Dp	Df	Dm	Di	F	S	R	Kg
18	5FB	1108	53.81	54.57	60	-	38	31	22	9.0	0.2
19	5FB	1108	56.84	57.61	63	-	38	31	22	9.0	0.3
20	5FB	1108	59.88	60.64	67	-	45	31	22	9.0	0.4
21	5FB	1108	62.91	63.67	70	-	47	31	22	9.0	0.4
22	5FB	1108	65.94	66.70	75	-	51	31	22	9.0	0.4
23	5FB	1108	68.97	69.73	79	-	54	32	22	10.0	0.5
24	5FB	1108	72.00	72.77	79	-	54	32	22	10.0	0.6
25	5FB	1108	75.04	75.80	87	-	56	32	22	10.0	0.6
26	5FB	1108	78.07	78.83	87	-	60	32	22	10.0	0.7
27	5FB	1108	81.10	81.86	91	-	62	32	22	10.0	0.8
28	5FB	1108	84.13	84.89	91	-	65	32	22	10.0	0.8
30	5FB	1210	90.20	90.96	97	-	71	32	25	7.0	0.9
32	5FB	1210	96.26	97.02	102	-	75	32	25	7.0	1.0
36	5FB	1210	108.39	109.15	120	-	89	32	25	7.0	1.4
40	5FB	1610	120.51	121.28	128	-	101	32	25	7.0	1.7
48	5FW	1610	144.77	145.53	150	92	124	32	25	7.0	2.7
60	9B	1610	181.15	181.91	-	92	166	32	25	4.0	2.4
72	3A	2012	217.53	218.30	-	106	202	32	32	-	4.4
84	3A	2012	253.90	254.68	-	106	236	32	32	-	6.0
96	3A	2012	290.30	291.06	-	106	270	32	32	-	7.1
120	3A	2012	363.07	363.83	-	106	343	32	32	-	8.5

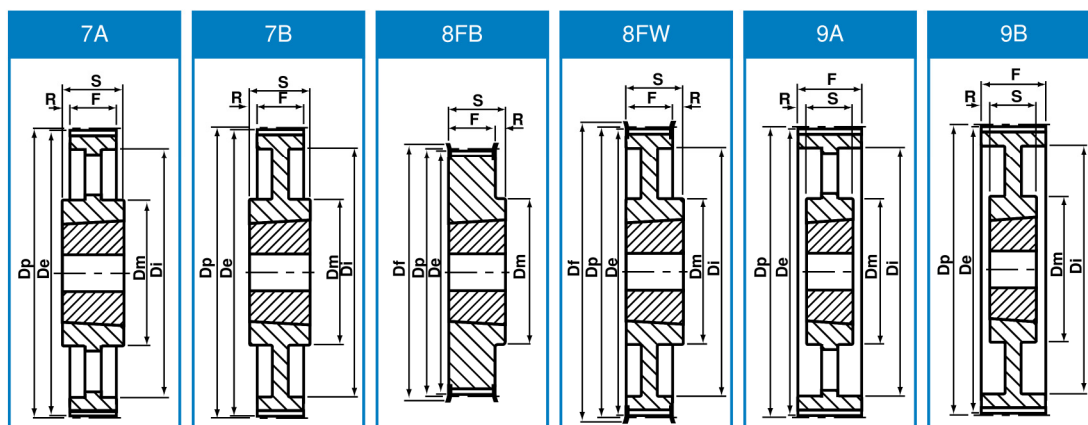

## Koła pasowe 1/2" (10.70mm) H100

Ilość zębów	Typ	Taper Lock	De	Dp	Df	Dm	Di	F	S	R	Kg
18	5FB	1210	71.39	72.77	79	-	52	31	25	6.0	0.5
19	5FB	1210	75.44	76.81	83	-	56	31	25	6.0	0.6
20	5FB	1210	79.48	80.55	87	-	60	31	25	6.0	0.7
21	5FB	1210	83.52	84.89	91	-	63	32	25	7.0	0.8
22	5FB	1210	87.56	88.94	94	-	67	32	25	7.0	0.9
23	5FB	1210	91.61	92.98	102	-	70	32	25	7.0	0.9
24	5FB	1610	95.65	97.02	102	-	75	32	25	7.0	1.0
25	5FB	1610	99.69	101.06	112	-	79	32	25	7.0	1.0
26	5FB	1610	103.73	105.11	112	-	83	32	25	7.0	1.2
27	5FB	1610	107.78	109.15	120	-	87	32	25	7.0	1.3
28	5FB	1610	111.82	113.19	120	-	91	32	25	7.0	1.5
30	5FB	1610	119.90	121.28	128	-	99	32	25	7.0	1.7
32	5FW	1610	127.99	129.36	135	92	108	32	25	7.0	2.0
36	5FW	1610	144.16	145.53	158	92	124	32	25	7.0	2.7
40	5FW	1610	160.33	161.70	168	92	140	32	25	7.0	3.6
44	3FB	2012	176.50	177.87	184	106	153	32	32	-	3.8
48	3FB	2012	192.67	194.04	200	106	169	32	32	-	3.2
60	9A	2012	241.18	242.55	-	106	223	34	32	1.0	4.8
72	9A	2012	289.69	291.06	-	106	270	34	32	1.0	5.7
84	9A	2012	338.20	339.57	-	106	318	34	32	1.0	6.8
96	7A	2517	386.71	388.08	-	119	366	34	45	6.0	8.2