

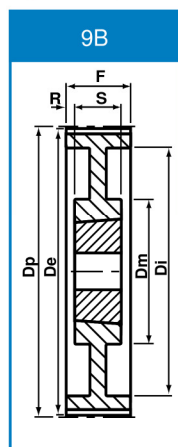
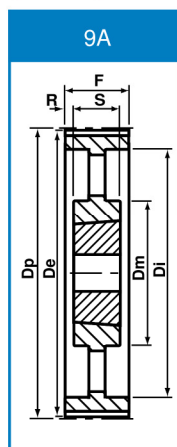
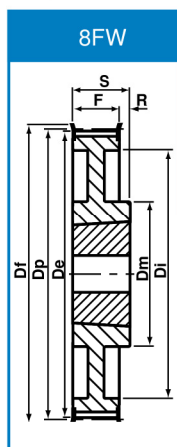


Koła pasowe pod Taper Lock

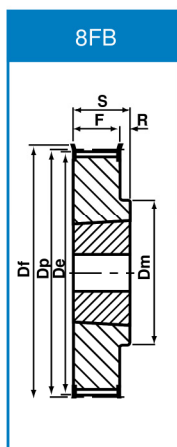

Koła pasowe 8M 30 (pod pas o szer. 30 mm)

Oznaczenie	ilość zębów	Typ	Taper Lock	Materiał	Dp	De	Df	Dm	Di	F	S	R	Kg
22-8M-30	22	5FB	1008	Żeliwo	56.02	54.65	60.00	-	41	28	22	6.00	0.24
24-8M-30	24	5FB	1108		61.12	59.75	66.00	-	42	38	22	16.00	0.38
26-8M-30	26	5FB	1108		66.21	64.84	71.00	-	46	38	22	16.00	0.45
28-8M-30	28	5FB	1108		71.30	70.08	75.00	-	50	38	25	13.00	0.50
30-8M-30	30	1FB	1615		76.39	75.13	83.00	-	-	38	38	-	0.55
32-8M-30	32	1FB	1615		81.49	80.16	87.00	-	-	38	38	-	0.59
34-8M-30	34	1FB	1615		86.58	85.22	91.00	-	-	38	38	-	0.77
36-8M-30	36	1FB	1615		91.67	90.30	98.50	-	-	38	38	-	0.96
38-8M-30	38	1FB	1615		96.77	95.39	103.00	-	-	38	38	-	1.15
40-8M-30	40	1FB	1615		101.86	100.49	106.00	-	-	38	38	-	1.34
44-8M-30	44	4FB	2012		112.05	110.67	119.00	-	91	38	32	3.00	1.33
48-8M-30	48	4FB	2012		122.23	120.86	127.00	-	95	38	32	3.00	1.78
56-8M-30	56	4FB	2012		142.60	141.23	148.00	-	117	38	32	3.00	3.76
64-8M-30	64	8FB	2517		162.97	161.60	168.00	125	-	38	45	7.00	4.20
72-8M-30	72	8FW	2517		183.35	181.97	192.00	125	158	38	45	7.00	4.30
80-8M-30	80	8W	2517		203.72	202.35	-	125	180	38	45	7.00	4.60
90-8M-30	90	8A	2517		229.18	227.81	-	125	204	38	45	7.00	5.00
112-8M-30	112	8A	2517		285.21	283.83	-	125	260	38	45	7.00	6.20
144-8M-30	144	8A	2517		366.69	365.32	-	125	341	38	45	7.00	9.00

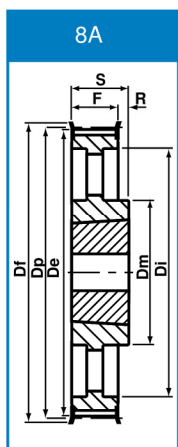

Koła pasowe 8M 50 (pod pas o szer. 50 mm)

Oznaczenie	ilość zębów	Typ	Taper Lock	Materiał	Dp	De	Df	Dm	Di	F	S	R	Kg
28-8M-50	28	5FB	1210	żeliwo	71.30	70.08	75.00	-	50	60	25	35.00	0.60
30-8M-50	30	5FB	1615		76.39	75.13	83.00	-	58	60	38	22.00	0.65
32-8M-50	32	5FB	1615		81.49	80.16	87.00	-	62	60	38	22.00	0.82
34-8M-50	34	5FB	1615		86.58	85.22	91.00	-	65	60	38	22.00	1.10
36-8M-50	36	5FB	1615		91.67	90.30	98.50	-	68	60	38	22.00	1.30
38-8M-50	38	5FB	1615		96.77	95.39	103.00	-	72	60	38	22.00	1.60
40-8M-50	40	4FB	2012		101.86	100.49	106.00	-	82	60	32	14.00	1.71
44-8M-50	44	4FB	2012		112.05	110.67	119.00	-	91	60	32	14.00	1.78
48-8M-50	48	4FB	2012		122.23	120.86	127.00	-	96	60	32	14.00	2.30
56-8M-50	56	4FB	2517		142.60	141.23	148.00	-	116	60	45	7.50	3.40
64-8M-50	64	4FB	2517		162.97	161.60	168.00	-	137	60	45	7.50	5.00
72-8M-50	72	4FB	2517		183.35	181.97	192.00	125	158	60	45	7.50	6.70
80-8M-50	80	4A	3020		203.72	202.35	-	-	180	60	51	4.50	8.80
90-8M-50	90	9B	3020		229.18	227.81	-	170	204	60	51	4.50	10.00
112-8M-50	112	9B	3020		285.21	283.83	-	170	260	60	51	4.50	12.00
144-8M-50	144	9A	3020		366.69	365.32	-	170	341	60	51	4.50	15.20
168-8M-50	168	7A	3525		427.81	426.44	-	190	402	60	65	2.50	16.40
192-8M-50	192	7A	3525		488.92	487.55	-	190	460	60	65	2.50	21.80