

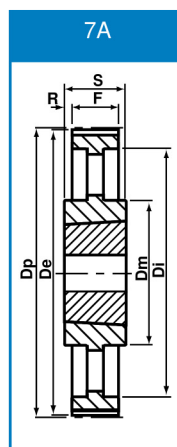
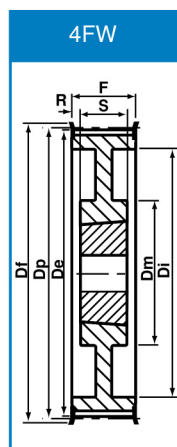
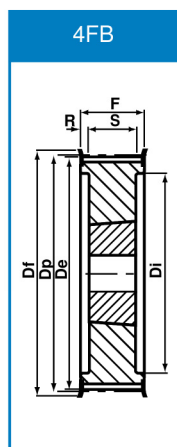


# Koła pasowe pod Taper Lock

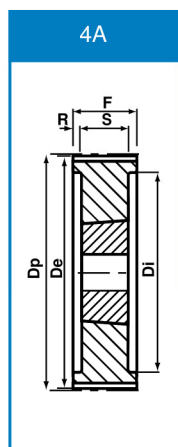

## Koła pasowe 8M 85 ( pod pas o szer. 85 mm)

Oznaczenie	ilość zębów	Typ	Taper Lock	Materiał	Dp	De	Df	Dm	Di	F	S	R	Kg
34-8M-85	34	4FB	1615	żeliwo	86.58	85.22	91.00	-	65	95	38	28.50	1.43
36-8M-85	36	4FB	1615		91.67	90.30	98.50	-	68	95	38	28.50	1.87
38-8M-85	38	4FB	1615		96.77	95.39	103.00	-	72	95	38	28.50	2.20
40-8M-85	40	4FB	2012		101.86	100.49	106.00	-	82	95	32	31.50	1.80
44-8M-85	44	4FB	2012		112.05	110.67	119.00	-	91	95	32	31.50	2.30
48-8M-85	48	4FB	2517		122.23	120.86	127.00	-	100	95	45	25.00	2.66
56-8M-85	56	4FB	2517		142.60	141.23	148.00	-	117	95	45	25.00	4.45
64-8M-85	64	4FB	2517		162.97	161.60	168.00	-	137	95	45	25.00	6.20
72-8M-85	72	4FB	3020		183.35	181.97	192.00	-	158	95	51	22.00	8.00
80-8M-85	80	4A	3020		203.72	202.35	-	-	180	95	51	22.00	10.00
90-8M-85	90	9B	3020		229.18	227.81	-	170	204	95	51	22.00	10.80
112-8M-85	112	9B	3020		285.21	283.83	-	170	260	95	51	22.00	15.00
144-8M-85	144	9A	3525		366.69	365.32	-	190	341	95	65	15.00	20.00
168-8M-85	168	9A	3525		427.81	426.44	-	190	402	95	65	15.00	23.00
192-8M-85	192	9A	3525		488.92	487.55	-	190	460	95	65	15.00	28.50

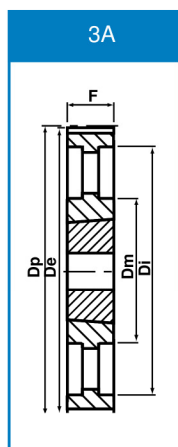

## Koła pasowe 14M 40 ( pod pas o szer. 40 mm)

Oznaczenie	ilość zębów	Typ	Taper Lock	Materiał	Dp	De	Df	Dm	Di	F	S	R	Kg
28-14M-40	28	4FB	2012	żeliwo	124.78	122.12	127.00	-	98	54	32	11.00	2.10
29-14M-40	29	4FB	2012		129.23	126.57	138.00	-	100	54	32	11.00	2.38
30-14M-40	30	4FB	2012		133.69	130.99	138.00	-	100	54	32	11.00	2.65
32-14M-40	32	4FB	2012		142.60	139.88	154.00	-	104	54	32	11.00	3.40
34-14M-40	34	4FB	2517		151.52	148.79	160.00	-	110	54	45	4.50	3.87
36-14M-40	36	4FB	2517		160.43	157.68	168.00	-	120	54	45	4.50	4.80
38-14M-40	38	4FB	2517		169.34	166.60	183.00	-	130	54	45	4.50	5.40
40-14M-40	40	4FB	2517		178.28	175.49	188.00	-	138	54	45	4.50	6.00
44-14M-40	44	4FB	3020		196.08	193.28	211.00	-	155	54	51	1.50	7.80
48-14M-40	48	4FB	3020		213.90	211.11	226.00	-	170	54	51	1.50	9.40
56-14M-40	56	4FW	3020		249.55	246.76	256.00	170	208	54	51	1.50	10.10
64-14M-40	64	4FW	3020		285.21	282.41	296.00	170	242	54	51	1.50	13.40
72-14M-40	72	9B	3020		320.86	318.06	-	170	280	54	51	1.50	15.20
80-14M-40	80	9A	3020		356.51	353.71	-	170	315	54	51	1.50	16.00
90-14M-40	90	9A	3020		401.07	398.28	-	170	360	54	51	1.50	17.80
112-14M-40	112	9A	3020		499.11	496.32	-	170	457	54	51	1.50	25.60
144-14M-40	144	9A	3020		641.71	638.92	-	170	600	54	51	1.50	32.00
168-14M-40	168	9A	3020		748.66	745.87	-	170	706	54	51	1.50	44.00
192-14M-40	192	9A	3020		855.62	852.82	-	170	813	54	51	1.50	49.00
216-14M-40	216	9A	3020	962.57	959.76	-	170	920	54	51	1.50	55.00	